

The **EASYMIG 160** is a semi-automatic welding machine combining **MIG/MAG**, flux-cored wire and **MMA** welding processes. Thanks to its user-friendly interface and digital display screen, the voltage and wire-feed speed settings are quick and easy to set and adjust. Its ultra-light design makes it extremely easy to move around the worksite. The **EASYMIG 160** is recommended for welding steel, stainless steel and aluminium.



### Ultra-light and portable

- Weighs 10.1 kg
- Ergonomic handle

### Robust design

- Reinforced mechanical structure
- Rubber feet to absorb shocks / vibrations

### Integrated wire feeder

- $\varnothing$  100 (1 kg) wire reels
- $\varnothing$  200 (5 kg) wire reels
- Two-roll wire-feed motor
- Supplied rollers:
  - Steel: 0.8
  - No gas: 0.9


### MIG/MAG Torch

- Supplied with a detachable torch (150 A - 2.20 m) for working with steel
- EURO torch for a fast assembly/disassembly

### Digital displays

- Voltage
- Current

### Easy set up

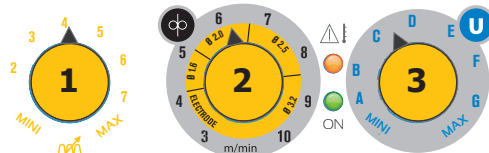

1. Manually adjust the arc dynamics (MIG/MAG)
2. Select the wire-feed speed between 3 - 10 m/minute (MIG/MAG)  
Select the electrode (MMA)
3. Set voltage between 15 - 22 V (MIG/MAG)

### Simplified display

Two colour LEDs:

- Thermal protection warning LED
- Power On LED

### MIG/MAG - MMA

- Wire diameter  $\varnothing$  0.6 mm - 0.8 mm
- Electrode  $\varnothing$  1.6 mm - 3.2 mm

### Polarity reversal cable

- For NO GAS welding.



### Features



Inverter technology to ensure excellent welding-current quality and a low electricity consumption.



Suitable for rutile electrodes. Anti-Stick technology (prevents the electrode from sticking to the workpiece)



suitable for:  
- Gas-shielded, wire MIG/MAG welding  
- No-Gas, flux-cored wire MIG/MAG welding

### NO GAS ready to weld

This process allows:

- Welding with flux-cored wire (requires polarity reversal).
- Allows outdoor welding (not affected by wind).
- Increased portability due to absence of gas bottles.
- Ideal for outdoor work on thin metal sheets.

### Includes

- **Earth clamp** (cable 1.6 m / 16 mm<sup>2</sup>)
- **Electrode holder** (cable 1.6 m / 16 mm<sup>2</sup>)
- **Accessories box**
  - Contact tip (0.9 mm)
  - Gas nozzle
  - Contact tip spanner
  - Gas pipe (1 m)
  - Gas-pipe clamp (x2)



50/60hz	MMA I <sup>2</sup>	min > max	Ømm		100	200	Electronic Control	équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica	EN60974-1 (40°C)				cm/kg	
			GAS	NO GAS					I <sub>A</sub> (60%)	X% (I <sub>2</sub> max)	I <sub>A</sub> (60%)	X% (I <sub>2</sub> max)		
230V 1~	16A	20 > 140A	30 > 160A	0.6 - 0.8	0.9	✓	✓	0.8 - 0.9	0.8	95A	160A 20%	90A	140A 20%	40x20x33 / 10.1