

The W5S-4L separate air and water cooled wire feeder is compatible with MAGYS 400 GR, 500 GR and 500 WS welding machines.

SYNERGIC

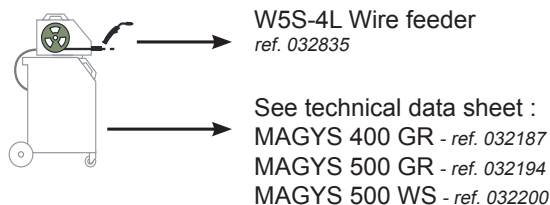
- **Synergic function** : The wire speed setting is controlled from the wire feeder.

INDUSTRIAL

- Can be fitted with both air cooled and water cooled torches for optimal productivity.
- Its heavy duty construction ensures a long service life.
- Its 4 wheel drive system combined with a 50W motor ensures effective wire feeding with solid wires up to Ø 1.2 mm.




COMPACT

- Compact wire feeder with small dimensions to fit down a man hole (40cm diameter).
- Inter connection cables (air or water) from 1.6m to 20m.



OPTIONS





Regulator 30L/min
 041622
 041219
  041646



Polarity reversal cable
033689

Connection cables

L.	Air cooled		Liquid cooled	
1,6m	-		70 mm ²	033696
5m	50 mm ²	034822	-	
5m	70 mm ²	034839	70 mm ²	033641
10m	50 mm ²	034853	70 mm ²	033658
10m	70 mm ²	034860	95 mm ²	034877
15m	-		95 mm ²	034884
20m	-		95 mm ²	034891

U ₁		I ₁		Ømm		Ømm		Electronic Control	équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica	EN60974-5 (40°C)	IP	cm/kg
		GAS	NO GAS	200	300							
24V	3A	0.6	0.9	✓	-		0.8	50W	410A @ 60%	IP21	23x32x49 / 15	
		1.2	1.2				1.0		320A @ 100%			