


The COMBIDUCTION AUTO 50 LG induction heater provides immediate heating power for the unseizing and heating of steel or aluminium. Fitted with a specialised connector, this appliance brings together various inductors used for both mechanical and maintenance operations, as well as for car-body work. The device's versatility offers a wide range of solutions for the unseizing, unblocking, straightening, repairing and removal of component parts.


SET APART BY ITS VERSATILITY

Bodywork inductors ● Supplied as standard ● Optional



- Removes seized steel or aluminium parts
- Straightens bent frames (except HLE steel)
- Removes all decals, badges, strips and mouldings
- Removes direct glazed windows while preserving the trim (from rear windows, rear-quarter windows, panoramic sunroofs, etc.)
- Removes stone-guard protection underseal and sealer
- Repairs minor bodywork dents without damaging the paintwork

Mechanical inductors ● Supplied as standard ● Optional

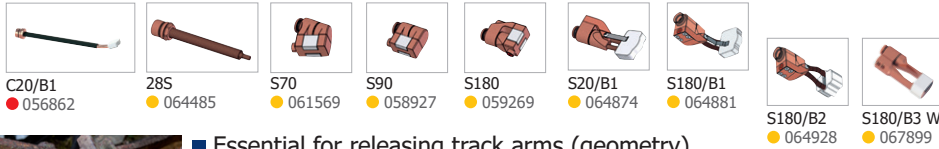

- Essential for releasing track arms (geometry)
- Removes glow plugs, seized wipers and spare wheel carriers
- Loosens bolts and steering-bar ball joints without damaging the gaitor/boot
- Removes seized wheel hub nuts
- Disassembles car or HGV exhaust systems



Liquid coolant (optional)






A specific welding coolant (ref. 052246) must be used with this machine that is not supplied as standard with this device.

Additional adapters and inductors












GUARANTEED TO SAVE YOU TIME AND POWERUSE

■ Heating power:
5,200 W, can be set in 500 W increments. Heats to the metal's core turning it red (approx. 800°C).

		
M14 → 1 s	2 mm → 3 s 4 mm → 5 s	∅ 10 → 10 s

■ Time-saving and safe:
Immediate, flameless heating to a precise area allowing you to work near cables, pipes or any heat-sensitive parts without taking them apart.

■ Easy and comfortable to use:
A three metre inductor cable enables you to work high up, or in places where you cannot take the power source.

			Freq.						
50 Hz	A	W	kHz	@ 35°C min	The liquid-cooling tank's capacity	cm	kg	m	m
230 V 1~	≥ 25	5 200	30-80	100 %	7 l	59 x 88 x 59	72	8	3