


## Rhino Cart Mobile Fixing Station



The Rhino Cart Mobile Fixing Station is a turnkey system for fixing and clamping in welding and fabrication. Clamp and fixture at any point on the reversible, flat, nitrided (heat treated) 1200 x 750 mm tabletop for accuracy in all of your setups. Accurately fit-up and hold work-pieces for tacking and welding with the Rhino Cart package, including: The Rhino Cart Welding Table + 66 piece Fixture Kit.

Table + Fixture Kit  
**ALL-IN-ONE**  
Mobility & Storage

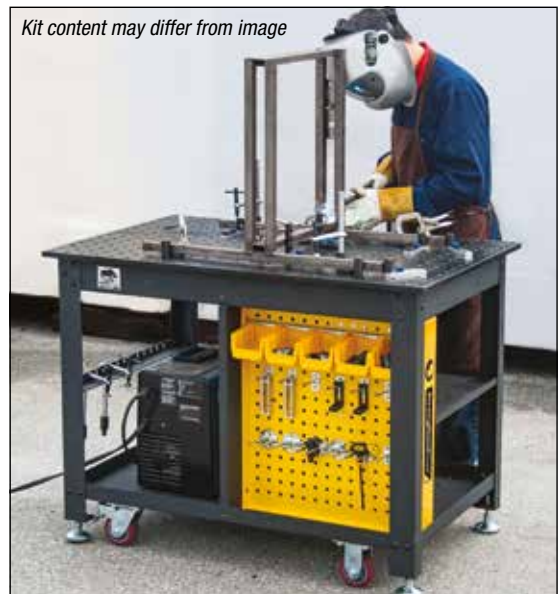

Kit content may differ from image

Part No.	Tabletop size	Tabletop thickness	Holes diameter	Grid pattern	Table height	Loading capacity	Package gross weight
<b>TDQ612075-K1</b>	1200 x 750 mm	16 mm	16 mm	50 x 50 mm	910 mm	680 kg	235 kg

### Rhino Cart + 66 Piece Fixture kit



Item	Part No.	Description	Weight	Qty
1	<b>TDQ612075</b>	Welding Table, 1200 x 750 mm, 910 mm height, 16 mm thickness, 16 mm hole, 50 x 50 mm grid pattern, Nitrided Finishing Tabletop, Adjustment Height Range by Leveling Pad from 0 - 50 mm, 680 kg static loading capacity	185 kg	1
2	<b>T65055</b>	Ball Lock Bolt, Adjustable range: 22 mm - 27 mm. Connecting tables to accessories and accessories to accessories	0.1	10
3	<b>T64201</b>	Locating Pin goes into 16 mm holes, no locking	0.1	2
4	<b>PT07K</b>	Inserta Pliers, 60 mm opening, Max. 50 mm reach	0.3	2
5	<b>PT09K</b>	Inserta Pliers, 100 mm opening, Max. 75 mm reach	0.4	2
6	<b>UDN6150</b>	Inserta Clamp, 150 mm opening, 83 mm reach, 16 x 8 mm (D Rail), T-Handle	0.5	2
7	<b>T64217</b>	Magnetic Top V pads for Inserta Pliers and Inserta Clamps	0.1	2
8	<b>TCX6210</b>	Side Clamp, 38 mm stroke	0.3	2
9	<b>T64203</b>	Stop, ø 25 x 38 mm	0.2	4
10	<b>T64205</b>	Stop, ø 25 x 50 mm	0.2	4
11	<b>T64216</b>	V-Block, ø 40 x 23 mm	0.1	8
12	<b>T64211</b>	V-Block Spacer, ø 38 x 11.5 mm	0.1	4
13	<b>T60630</b>	D-Stop Bar, 120 x 25 x 11.5 mm	0.1	8
14	<b>T50737</b>	Magnetic Rest Button, ø 40 x 11.5 mm	0.1	12
15	<b>T60304</b>	Right Angle Bracket, 41 x 91 x 30 mm	0.2	2
16	<b>T60305</b>	Right Angle Bracket, 91 x 91 x 30 mm	0.2	2